

CONTRACTOR & INDUSTRIAL EQUIPMENT



NORTHWEST OHIO CORP.
CONTRACTORS & INDUSTRIAL EQUIPMENT
101 N. WESTWOOD
531-2833 TOLEDO, OHIO 43607



M4 1/2-T22



M5-T22



M11-T22



B & T-T22



K5-T22

WOOD HANDLE WHEELBARROWS


MODEL	M4 1/2*	M5*	M11*	K5
Max. cap., cu. ft.	4 1/2	5	5	4
Wheel Numbers	Approx. wt. Barrow with wheel			
T22, T22BB	58	59	70	59
T24, T24BB	58	59	70	59
164	67	68	79	73

When ordering, specify barrow model and wheel number. (KD wheelbarrows shipped with trays nested, 3 each per bundle) For tray and wheel descriptions see back page.

B&T (BRICK & TILE)	
Max. Cap.	120 BRICKS
App. wt. Barrow & Wheel	
T22, T22BB	67
T24, T24BB	68
164	80

Bed Length, 26 1/2", Bed Width 24", Dash Height 18 1/2"

*GLIDE RING
(Pat. No. 3,170,707) At each bolt hole in trays, so shovel or hoe will glide over bolt heads.



JACKSON MANUFACTURING COMPANY, P.O. BOX 1649, HARRISBURG, PA. 17105

CONTRACTOR & INDUSTRIAL EQUIPMENT



S4 1/2-T22



S5-T22



S11-T22




T5-T22

PIPE HANDLE WHEELBARROWS

MODEL	S4 1/2*	S5*	S11*	T5
Max. cap., cu. ft.	4 1/2	5	5	4
Wheel Numbers	Approx. wt. Barrow with wheel			
T22, T22BB	58	59	60	61
T24, T24BB	59	60	61	61
164	71	72	83	75

When ordering, specify barrow model and wheel number. (KD wheelbarrows shipped with trays nested, 3 each per bundle) For tray and wheel descriptions see back page.

***GLIDE RING**
(Pat. No. 3, 170, 707) At each bolt hole in trays, so shovel or hoe will glide over bolt heads.



CONTRACTOR & INDUSTRIAL EQUIPMENT




CONCRETE CART 8-88C

CONCRETE CART

CONCRETE CART	8-88C
Maximum capacity in cubic feet	8
Gauge of body	14
Body length (inside) in inches	41
Body width (inside) in inches	21
Body depth (inside) in inches	21½
Width overall in inches	35½
Approx. wt. in pounds	202



MORTAR PAN NO. 1

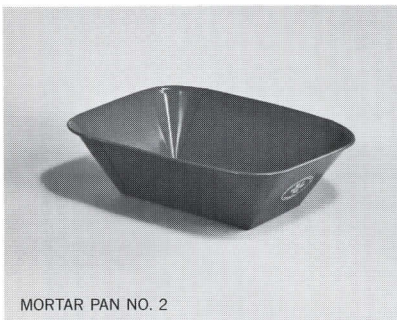


MORTAR PAN NO. 2



MORTAR PAN STAND

MORTAR PANS AND STANDS MIXING BOXES

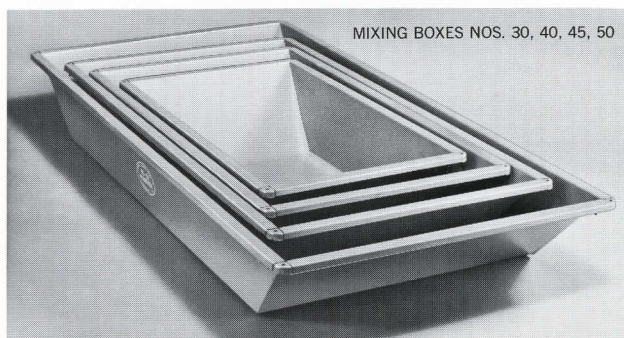

MIXING BOXES NOS. 30, 40, 45, 50

	MORTAR PANS*		MIXING BOXES				MORTAR PAN STAND
	No. 1	No. 2	No. 30	No. 40	No. 45	No. 50	
Max. cap., cu. ft.	3	3	6	11	16	21	
Gauge	17	17	16	16	14	14	
Overall length in inches	29	29	51½	64	75½	94	
Overall width in inches	29	21	30	36	40	46	
Vertical depth in inches	7	8	11	11	11	11	
Approx wt., lbs.	16	18	43	70	100	150	8

*Nested



100SW

200

300

400

400TG

450

NEW

CONVERTI-TRUK II

CONVERTI-TRUK

HAND TRUCKS

MODEL	MAX. CAPACITY	WHEEL NUMBER	NOSE PLATE	FRAME WIDTH	OVERALL WIDTH	OVERALL HEIGHT	APPROX. WT. LBS.
100 SW	100 lbs.	P5125	7" x 14" x 11 ga.	12"	14"	42½"	10
200	200 lbs.	300T	7" x 14" x 11 ga.	13¾"	17¼"	44½"	18
*300	300 lbs.	300T	8" x 14" x ⅜"	13¾"	21"	44¾"	27
*400	450 lbs.	275T-BB	9" x 14" x ⅜"	13¾"	21"	44¾"	34
*400 TG	450 lbs.	275T-BB	9" x 14" x ⅜"	13¾"	21"	44¾"	34
*450	500 lbs.	275T-BB	9" x 14" x ⅜"	13¾"	21"	50¾"	36
* Converti-Truk	Upright 500 lbs. 4 wheel 600 lbs.	275T-BB 4" casters (one with brake)	9" x 14" x ⅜"	13¾"	21"	Upright 47" 4 wheel 37½"	45
* Converti-Truk II	400 lbs.	300T	8" x 14" x ⅜"	13¾"	21"	44"	35

* Equipped with stair skids and wheel guards. For wheel descriptions see below.



CONVERTI-TRUKS
USE HORIZONTALLY
OR VERTICALLY

Trays

TRAY	Length Inches	Width Front Inches	Vertical Depth Front Inches	Max. Capacity Cu. Ft.	Nom. Gauge	Approx. Weight Pounds
M4-½-S4-½	37½	27¾	10	4½	16	21
M5-S5	38½	27¼	10¾	5	16	22
M11-S11	38	25	13	5	16	33
K5-T5	36	28½	8¼	4	16	22

Slow-Speed Pneumatic Tire Wheels

Wheel Number	Nominal Diameter Inches	Tire Size Inches	Maximum Pressure Pounds	Hub Length Inches	Bore Inches	Bearings	Approx. Weight Pounds
*T22	16	4.00x8	2	35	6	⅝	Oilube 7.5
*T22BB	16	4.00x8	2	35	6	⅝	Ball 7.5
*T24	16	4.00x8	4	60	6	⅝	Oilube 7.5
*T24BB	16	4.00x8	4	60	6	⅝	Ball 7.5
88C	26	4.00x18	2	60	4¼	1¼	Cage 34

*TUBELESS.

† Figure 4 indicates 4-ply rating.

Slow-Speed Semi-Pneumatic Tire Wheel

Wheel Number	Nominal Diameter Inches	Tire Size Inches	Hub Length Inches	Bore Inches	Bearings	Approx. Weight Pounds
164	16	16x4.00	6	⅝	Oilube	22
P5125	5	5x1.25	1¼	⅜	Plain	1
300T	8	8x1.75	2½	½	Oilube	3
275T-BB	10	10x2.75	3½	⅝	Ball	6
175	10	10x1.75	2	½	Oilube	3


WELDING CART 5

Overall height . . . 38½"
Overall width . . . 25½"
Platform base . . 20" wide,
10⅞" deep

175 wheels
Tool tray,
cylinder retainer chains.
Carries tanks in following
standard combinations:

Oxygen	Acetylene
110 cu. ft. . . . 122 cu. ft.	
122 cu. ft. . . . 145 cu. ft.	
122 cu. ft. . . . 169 cu. ft.	

Approximate Weight: 28 lbs.

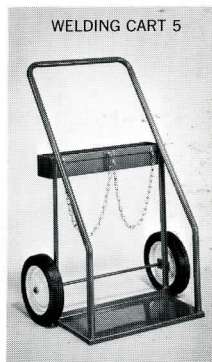

WELDING CART 5

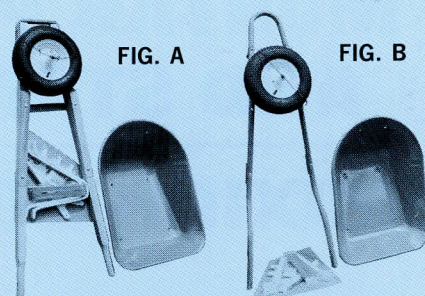


FIG. A

FIG. B

Knocked-Down Barrows

VACUUM PACK contains hardware, legs, leg brace, axle, axle brackets and tray braces attached to M and K frames (Fig. A) shipped separately with S and T barrows (Fig. B).

LEG ASSEMBLY (Pat. No. 3,552,762) for M, K, S and T barrows. Solid steel brace interlocks with steel legs for added strength.

Trays nested 3 per bundle for lowest LTL freight rates. Order barrows in multiples of three.

JACKSON MANUFACTURING COMPANY

P.O. BOX 1649, HARRISBURG, PA. 17105

Specifications subject to change without notice